




# Ground Preparation Equipment

## GRADER LEVELER

Our grader leveler is an implement with a variety of uses. It is used to smooth and level small areas such as farm lanes and roads, small gardens, terraces, and other difficult-to-access areas. It follows close to the back of the tractor for better leveling on wavy terrain and for turning in small areas.

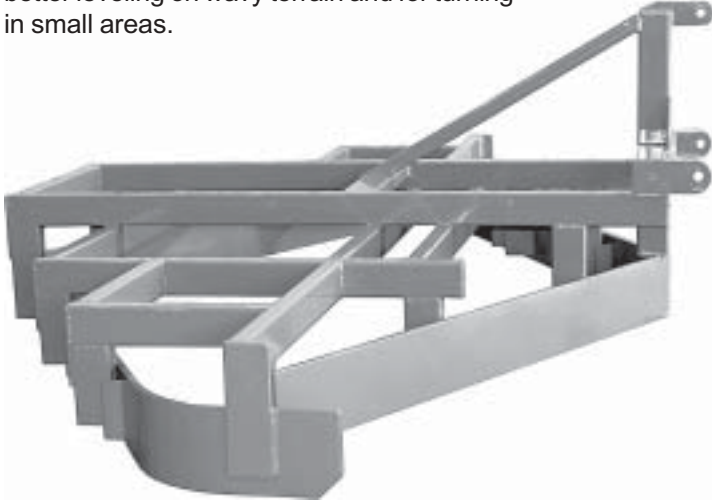

Part #	Description
--------	-------------


BP050	8 ft (2.4 m) wide grader leveler
-------	----------------------------------

BP052	10 ft (3.0 m) wide grader leveler
-------	-----------------------------------

BP054	12 ft (3.7 m) wide grader leveler
-------	-----------------------------------

Our standard grader levelers fit a standard three-point Category II hitch. Call our sales department for weights and dimensions.

## LEVEL BOARD

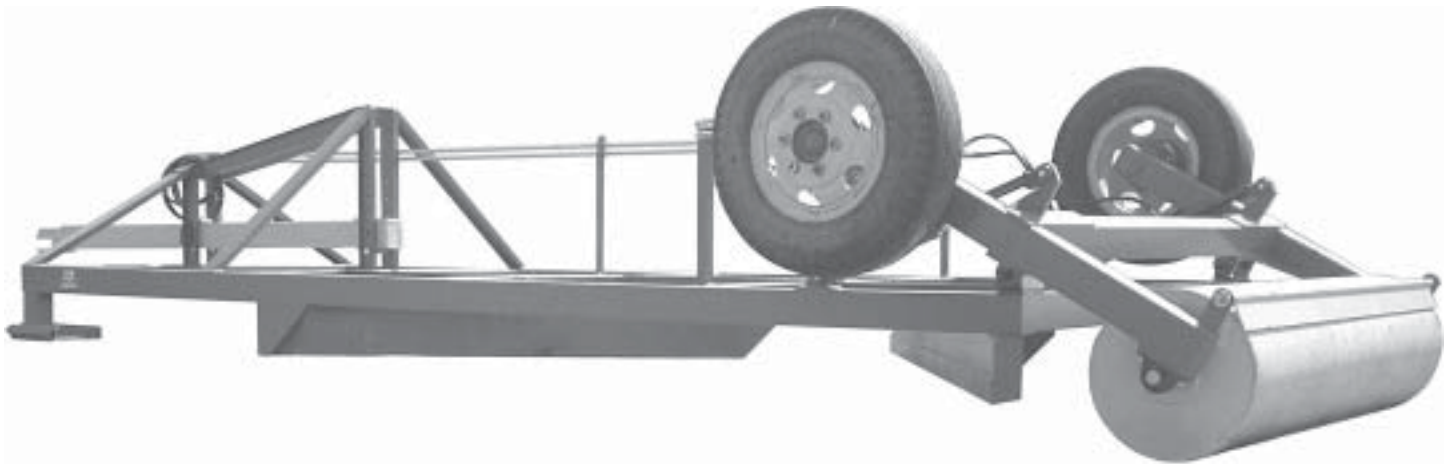

A level board is used to apply the finishing touches to an un-level field. A correctly leveled field has good irrigation and drainage characteristics. The level board leaves a smooth finish and does not create or deposit any washboard surfaces.

As the level board passes over uneven terrain in the field, its blades scrape soil from the high areas and roll it into the low areas. Hydraulic cylinders connected to the tongue and rear roller are used to control the front to back height of the level board. Soil is moved from side to side as the level board passes over an area, filling in low spots. Any excess soil not needed to fill low areas is passed out the rear of the machine to the side. A finishing roller compacts the soil to minimize blowing dust and to show the quality of the leveling action.

The Kennco level board includes hydraulic adjustment to prevent the machine from digging too deeply into the soil if the tractor passes through a low spot in the field or begins to experience wheel slippage. It also includes cutting edges for the leveling blades that can be replaced when they wear. It can be set up with laser leveling systems.

Part #	Description
--------	-------------

BP100	8 ft (2.4 m) wide level board
-------	-------------------------------

BP150	10 ft (3.0 m) wide level board
-------	--------------------------------

BP160	12 ft (3.7 m) wide level board
-------	--------------------------------

BP170	14 ft (4.3 m) wide level board
-------	--------------------------------

Standard level boards are pulled from the tractor drawbar. Threaded hydraulic fittings will be supplied unless special fittings (such as quick disconnect couplings) are specified by the customer. Call our sales department for weights and dimensions.